



app.print.technical_data_sheet.title

IGP-HWFsuperior 5703U-S1

Matte, effect powder coating in super durable-PLUS quality with increased scratch resistance, manufactured with IGP-Effectives® technology for unrivalled material efficiency.



app.print.technical_data_sheet.characteristics

- Matte
- Smooth finish
- IGP-Effectives®
- Super durable facade quality, 5 years Florida > 50% residual gloss
- Increased scratch resistance
- Clean Effect



- GSB 173 r - Florida 5
- Qualicoat Nr. P-1172, class 2



app.print.technical_data_sheet.powder_properties.title

app.print.technical_data_sheet.powder_properties.particle_size: 100 µm
 app.print.technical_data_sheet.powder_properties.solid: 99.96%
 app.print.technical_data_sheet.powder_properties.density: 1.2 kg/l
 app.print.technical_data_sheet.powder_properties.storage_suitability.prefix: 24 months
 app.print.technical_data_sheet.powder_properties.storage_suitability.at: 25 °C
 in an unopened original container



app.print.technical_data_sheet.processing.title

app.print.technical_data_sheet.processing.substrates

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

Aluminium

- Chromating according to DIN EN 12487
- Pre-anodization
- Chrome-free pretreatment according to GSB International and QUALICOAT specifications

Steel

- Zinc phosphating

Galvanised steel

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

For improved corrosion protection for applications on steel / galvanised steel, the use of corrosion protection primer IGP-KORROPRIMER 10 or IGP-KORROPRIMER 60 is recommended.

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

app.print.technical_data_sheet.processing.coating_devices

All conventional electrostatic systems with corona charging.

For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.


app.print.technical_data_sheet.processing.recommended_film_thickness

60 µm - 80 µm

A homogeneous coating result with textured coatings or article- and color specific differences in hiding power may require higher coating thicknesses. The corresponding processing guidelines must be observed.

For a pre-calculation of the required powder coating quantity, the necessary coating thickness must be determined for each article.

app.print.technical_data_sheet.processing.curing_condition_recommendation

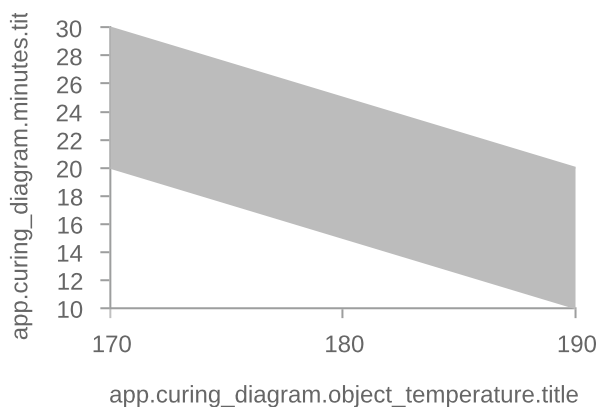

app.print.technical_data_sheet.processing.curing_conditi

170 °C

180 °C

190 °C

In order to determine ideal curing conditions, we recommend practical trials with the respective object and curing oven.

app.print.technical_data_sheet.processing.reclaimability

Due to the high bonding rate of powder grain and effect agent, the powder can be charged much more uniformly compared to other effect finishing processes. As a result, the powder can be processed with a significantly increased recovery rate. Please also refer to the IGP processing guideline for IGP-Effectives® powder coatings: VR201.2



app.print.technical_data_sheet.film_properties.title

app.print.technical_data_sheet.film_properties.tested_on.title

app.print.technical_data_sheet.film_properties.tested_on.title
 Apperiment (AtMg1) 0.8 mm chrom-free
 app.print.technical_data_sheet.film_properties.film_thickness:
 180°C 15 object temperature:

app.print.technical_data_sheet.film_properties.appearance

| | | |
|---|--------------|-------------------------|
| app.print.technical_data_sheet.film_properties.appearance | 25-75 Rz/60s | DIN EN ISO 2813 2015-02 |
|---|--------------|-------------------------|

app.print.technical_data_sheet.film_properties.mechanical_tests

| | | |
|----------------------------------|--------------|-------------------------|
| Cross-cut adhesion test | Gt 0 | DIN EN ISO 2409 2020-12 |
| Mandrel bending test / Tape test | ≤ 5 mm | DIN EN ISO 1519 2011 |
| Impact test / Tape test | ≥ 20 inchnp. | ASTM D 2794 1993 |
| Erichsen cupping / Tape test | ≥ 5 mm | DIN EN ISO 1520 2007-11 |
| Buchholz hardness | ≥ 80 | DIN EN ISO 2815 2003-10 |
| Robustness according to | ≥ 45 % | IGP AA341.62 |
| Martindale, residual gloss_45% | | |

app.print.technical_data_sheet.film_properties.weathering_tests

| | | |
|-----------------------------|---|----------------------------|
| 5 years Florida, 5° south | > 50 % | |
| | app.print.technical_data_sheet.film_properties.residual_gloss | |
| QUV-SE-B-313, 1000h | > 50 % | DIN EN ISO 16474-3 2014-03 |
| | app.print.technical_data_sheet.film_properties.residual_gloss | |
| Xenon-arc lamps, 1000h, 90% | > 90 % | DIN EN ISO 16474-2 2014-03 |
| | app.print.technical_data_sheet.film_properties.residual_gloss | |

app.print.technical_data_sheet.film_properties.corrosion_tests

| | | |
|------------------------------------|------------------------------|---------------------------|
| Acetic acid salt spray test, 1000h | No infiltration, no blisters | DIN EN ISO 9227 2017-07 |
| Condensation water test, 1000h | No infiltration, no blisters | DIN EN ISO 6270-2 2018-04 |

app.print.technical_data_sheet.film_properties.chemical_tests

| | | |
|-------------------|--|------------------|
| Mortar resistance | Easily removable after 24h with no residues. | ASTM D 3260 2001 |
|-------------------|--|------------------|



app.print.technical_data_sheet.more_information.title

app.print.technical_data_sheet.packaging.title

20 kg cardboard box with inserted antistatic PE liner

app.print.technical_data_sheet.processing.overcoating

Preliminary tests are mandatory for overcoating painted surfaces.

app.print.technical_data_sheet.processing.printing_and_glueing

Preliminary tests are mandatory for printing and glueing of painted surfaces.

app.print.technical_data_sheet.more_information.protection_of_coated_parts

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

app.print.technical_data_sheet.more_information.cleaning

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01. Technical Information IGP-TI 106 must also be observed when dealing with pearl mica effects.

app.print.technical_data_sheet.more_information.paint_removal_and_disposal

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

app.print.technical_data_sheet.infobox